



# BREATHER

- ALUMINIUM DIE CAST - VENTS UNDERNEATH
- FILTRATION 40 MICRONS STANDARD / OPTIONAL 10 MICRONS
- AIR FLOWS TO 25 CFM ( 750 LPM )
- METAL STRAINER - STANDARD
- HARDWARE INCLUDES GASKET


FLANGE TYPE



FSBA - \*\*

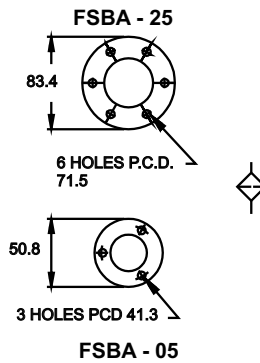

THREAD TYPE



TBA - \*\*

MODEL	DISPLACEMENT		RATING MICRONS	A					A / F	WT KGS
				B	C*	D				
FSBA - 05	150	LPM	40							
FSBA - 05 - 10	90	LPM	10	56	41	65	28	-		0.20
FSBA - 25	720	LPM	40							
FSBA - 25 - 10	400	LPM	10	82	50	91	48	-		0.40
TBA - 05	150	LPM	40	56	66	1/2*B/N	-	25.4		0.20
TBA - 05 - 10	90	LPM	10							
TBA - 25	720	LPM	40	82	85	1-1/4*B/N	-	42.0		0.30
TBA - 25 - 10	400	LPM	10							

**MODEL CODE : ASSEMBLY**

FSB*	- 25	- **	- **	- **
SERIES	CAPACITY CFM	FILTRATION MICRONS	STRAINER C* OPTIONAL(2)	FEATURE SPECIAL
FSBA - 05	05	40 - STD 10 - OPTIONAL	STD	DS - DIP STICK
FSBA - 25	25		L 4 - STD # L 6 - 152 mm L 8 - 203	DS - DIP STICK SG - SPLASH GUARD
TBA - 05	05		1/2*B/N	P5 - Pr 5 PSI SG - SPLASH GUARD
TBA - 25	25		1-1/4* B/N	DS - DIP STICK

# OPTIONAL / SPECIAL FEATURE ( CONSULT FACTORY ) - OMIT IF NOT REQUIRED

DIMENSIONS IN MM FOR REFERENCE ONLY